
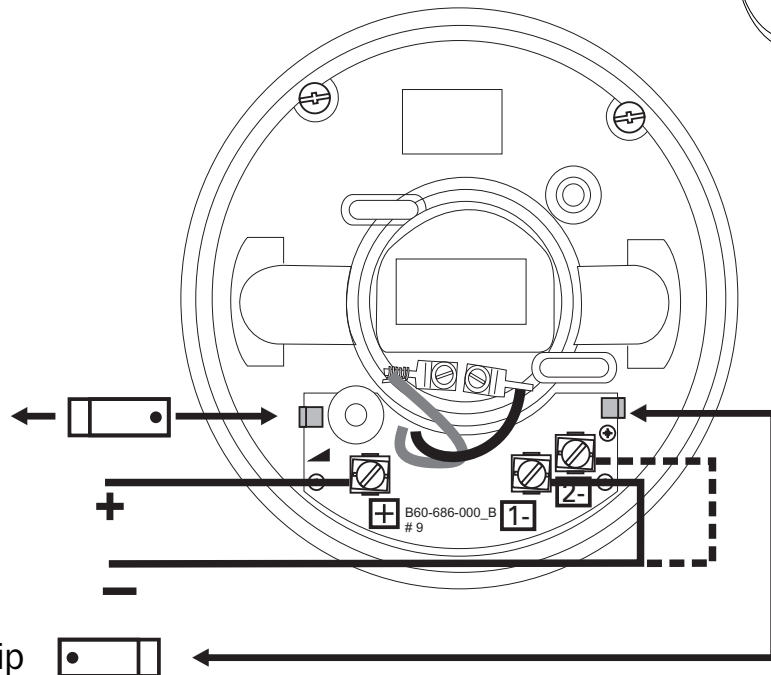
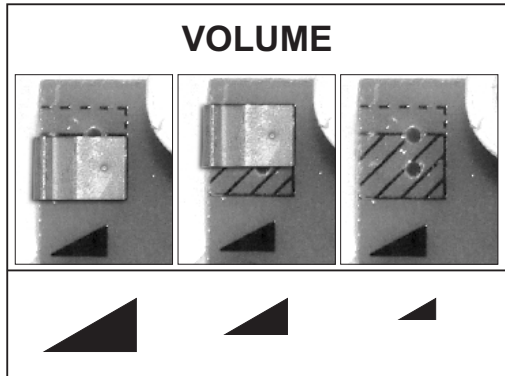


INSTALLATION INSTRUCTIONS FOR CEILING MOUNT SOUNDERS TYPE DBS1224B4W-D



Remove Clip ↓

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊗		
✓	✓		✓	—	1200-500Hz whoop evacuate
✓		✓	✓	—	800Hz continuous
✓	✓			—	500-1200Hz slow whoop
✓		✓		—	1200-500Hz whoop evacuate

Specification

Voltage Range
Output

12VDC (10V to 14V)
24VDC (19.5V to 28V)
max.85dB @ 1mtr (1200-500Hz whoop)
Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below).
Document Ref. D999.

Current

8mA @ 24VDC (800Hz continuous, High Volume)

Max wire size

2.5mm²

Temperature Range

-30 to +70°C

Meets the requirements of EN54-3, Type A
Min IP21C

For CPD data on all KAC devices please request D974

KAC Alarm Company Limited. KAC House, Thornhill Road,
North Moons Moat, Redditch, B98 9ND, England.
Tel: +44 (0) 1527 406655 Fax: +44 (0) 1527 406677 www.kac.co.uk