

L-VWM06A/EN(C) L-VWM06A/EN Cabinet Loudspeaker

- Intelligible voice and superior sound reproduction
- Robust metal enclosure
- Harmonious with all indoor decoration
- Simple power setting
- Easy installation
- EN54-24 certified
- AS ISO 7240-24 Certified Type A Speaker
- Available with or without capacitor(part number without "C")




L-VWM06A/EN is a high-performance 6W voice alarm cabinet loudspeaker. It provides a broad frequency response range, low distortion and high sound pressure level for accurate and intelligible broadcast of evacuation messages and high quality sound reproduction. It's ideal for sound distribution in various types of commercial buildings. Its low-profile, white color design blends easily with most interiors in locations such as hotels, conference rooms, cinemas, factories and exhibitions.

This voice alarm cabinet loudspeaker complies with BS 5859-8, EN54-24 and AS ISO 7240-24.


Technical Specifications

| | |
|----------------------------------|--|
| Model | L-VWM06A/EN L-VWM06A/EN(C) |
| Max power | 9 W |
| Rated power | 6 W |
| Power taps @ 100V | 6 W / 3 W / 1.5 W / 0.75 W |
| Power taps @ 70V | 3 W / 1.5 W / 0.75 W / 0.375 W |
| SPL at 6W/1W (100Hz-10KHz,1m) | 98 dB / 91 dB |
| SPL at 6W/1W (100Hz-10KHz,4m) | 86 dB / 79 dB |
| Frequency range (-10dB) | 300 Hz ~ 15 KHz |
| Rated input voltage | 100 V / 70 V |
| Rated impedance | 1.7K Ω / 3.3K Ω / 6.7K Ω / 13K Ω |
| Connection | Ceramic Terminal |
| Dimensions (W x H x D) | 170 mm x 170 mm x 63 mm |
| Diameter of speaker | 4" |
| Weight | 1.56 kg |
| Front grill color | White (RAL 9003) |
| Dome color | White (RAL 9003) |
| Thermal Fuse | 150° C |
| DC Blocking Capacitor | Yes (2.2uF) L-VWM06A/EN(C) No L-VWM06A/EN |


FREQUENCY RESPONSE

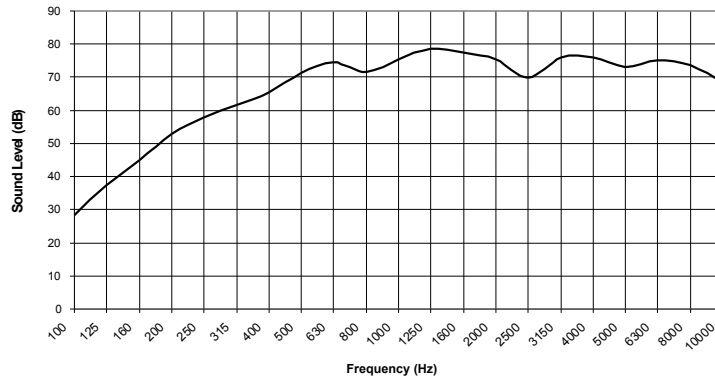

CIRCUIT DIAGRAM

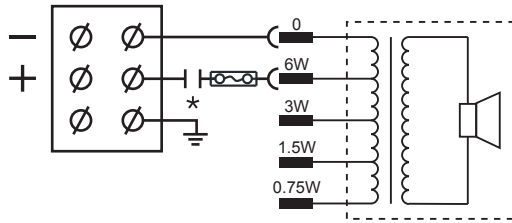

POLAR DIAGRAM

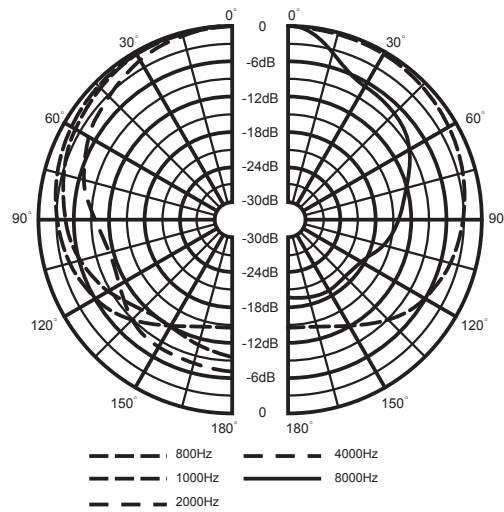

THREE-VIEW DIAGRAM

