



INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE SOU-XXX-4




SOU-XXX-4

'XXX' represents the code for the mounting box supplied.

- LPR low profile Red
- SR Standard profile Red
- SSR Standard profile Red + sealing kit

- LPW low profile White
- SW Standard profile White
- SSW Standard profile White + sealing kit

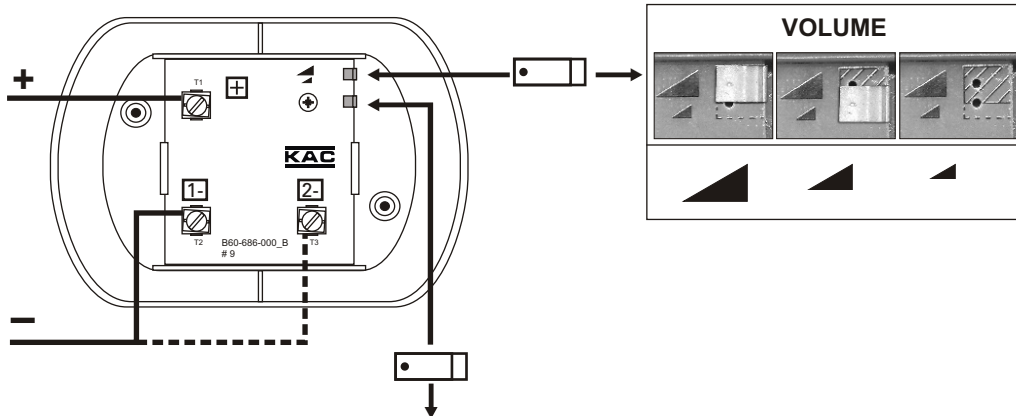

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊛		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone

Specification

- Voltage Range: 12VDC (10V to 14V)
24VDC (21V to 27V)
- Output: max.103dB(A) @ 1mtr
Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below).
Document ref: D 531.
- Current: 12mA @ 24VDC (800Hz continuous, High Volume)
- Max wire size: 2.5mm²
- Temperature Range: -30 to +70° C (subject to confirmation)
- IP Rating: Meets the requirements of EN54-3, Type A IP21C

KAC Alarm Company Limited, KAC House, Thornhill Road,
North Moons Moat, Redditch, B98 9ND, England.
Tel: +44 (0) 1527 406655 Fax: +44 (0) 1527 406677 www.kac.co.uk



INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE SOU-XXX-4




SOU-XXX-4

'XXX' represents the code for the mounting box supplied.

- LPR low profile Red
- SR Standard profile Red
- SSR Standard profile Red + sealing kit

- LPW low profile White
- SW Standard profile White
- SSW Standard profile White + sealing kit

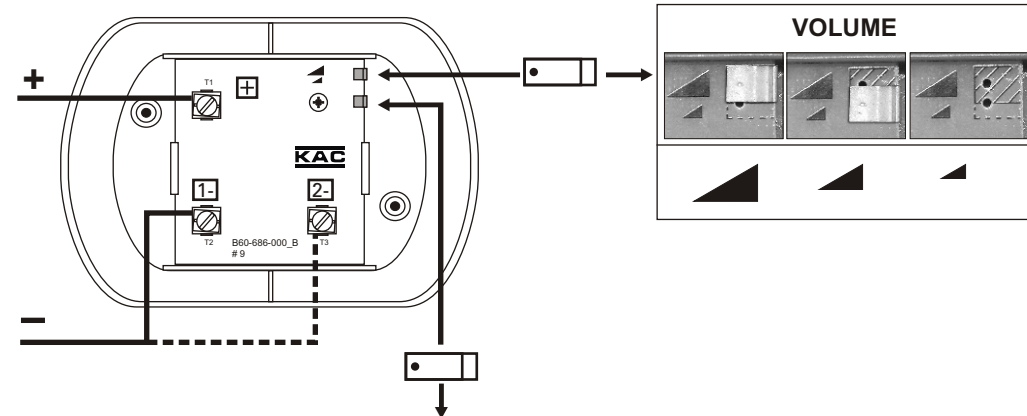

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊛		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone


Specification

- Voltage Range: 12VDC (10V to 14V)
24VDC (21V to 27V)
- Output: max.103dB(A) @ 1mtr
Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below).
Document ref: D 531.
- Current: 12mA @ 24VDC (800Hz continuous, High Volume)
- Max wire size: 2.5mm²
- Temperature Range: -30 to +70° C (subject to confirmation)
- IP Rating: Meets the requirements of EN54-3, Type A IP21C

KAC Alarm Company Limited, KAC House, Thornhill Road,
North Moons Moat, Redditch, B98 9ND, England.
Tel: +44 (0) 1527 406655 Fax: +44 (0) 1527 406677 www.kac.co.uk




INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE DBS-X-4



DBS-X-4

'X' represents the colour of the Lid if supplied.

- R Red
- W White

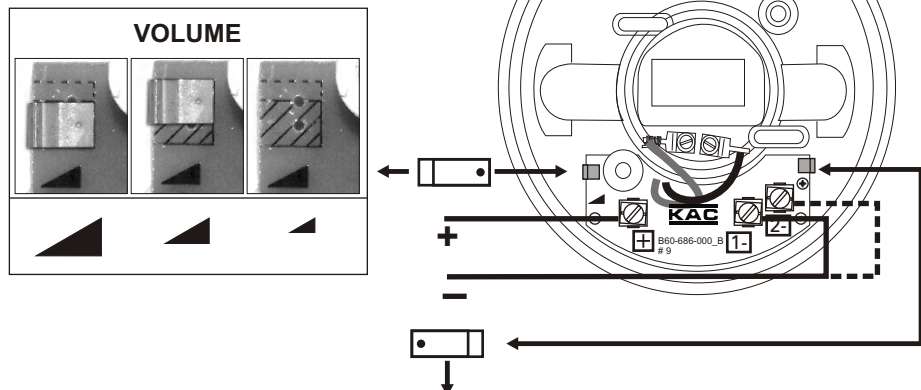

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊗		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone

Specification

Voltage Range 12VDC (10V to 14V)
24VDC (21V to 27V)

Output max.93dB(A) @ 1mtr
Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below).
Document ref: D 531.


Current 12mA @ 24VDC (800Hz continuous, High Volume)

Max wire size 2.5mm²

Temperature Range -30 to +70° C (subject to confirmation)
Meets the requirements of EN54-3, Type A IP21C




INSTALLATION INSTRUCTIONS FOR WALL MOUNT SOUNDERS TYPE DBS-X-4



DBS-X-4

'X' represents the colour of the Lid if supplied.

- R Red
- W White

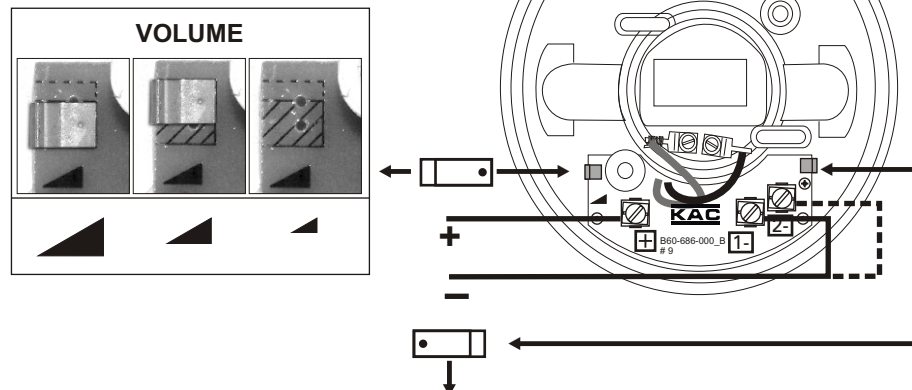

CONNECTION TERMINALS			LINK	TONE	
+	1-	2-	⊗		
✓	✓		✓	—	800Hz continuous
✓		✓	✓	⎓	800Hz/1000Hz alternating
✓	✓			—	500Hz/1200Hz slow whoop
✓		✓		⎓	800Hz DIN tone

Specification

Voltage Range 12VDC (10V to 14V)
24VDC (21V to 27V)

Output max.93dB(A) @ 1mtr
Sounder Output data, in accordance with EN54-3, is available on request, or via the website (details below).
Document ref: D 531.

Current 12mA @ 24VDC (800Hz continuous, High Volume)

Max wire size 2.5mm²

Temperature Range -30 to +70° C (subject to confirmation)
Meets the requirements of EN54-3, Type A IP21C